

**Coaxial Cabling : HD-TVI/AHD/HDCVI/CVBS Video Distributor**

**ITEM NO.: CD1664HD HD-TVI/AHD/HDCVI/CVBS 16 input 64 output Video Distributor**



CD1664HD is designed to be distribute 16 video signal to 64 video output, which is built in 19" standard 1U rack mounting cabinet. The application is perfect for larger industry CCTV installation where need multiple monitoring station. They are suitable for different floor in a building or different electrical field.


**CD1664HD HD-TVI/AHD/HD-CVI/CVBS 16 input 64 output Video Distributor in 1U Rack Mounting Panel**

**Features:**


- 16 video input to 64 video output. (16 sets 1 in 4 out video distributor)
- Support HD-TVI, AHD, HDCVI, 960H, NTSC, PAL video signal.
- Each channel with one output support HD video + data control mode.
- Video input, output, power input built in TVS protection.

**Installation View:**

Slide switch at video:

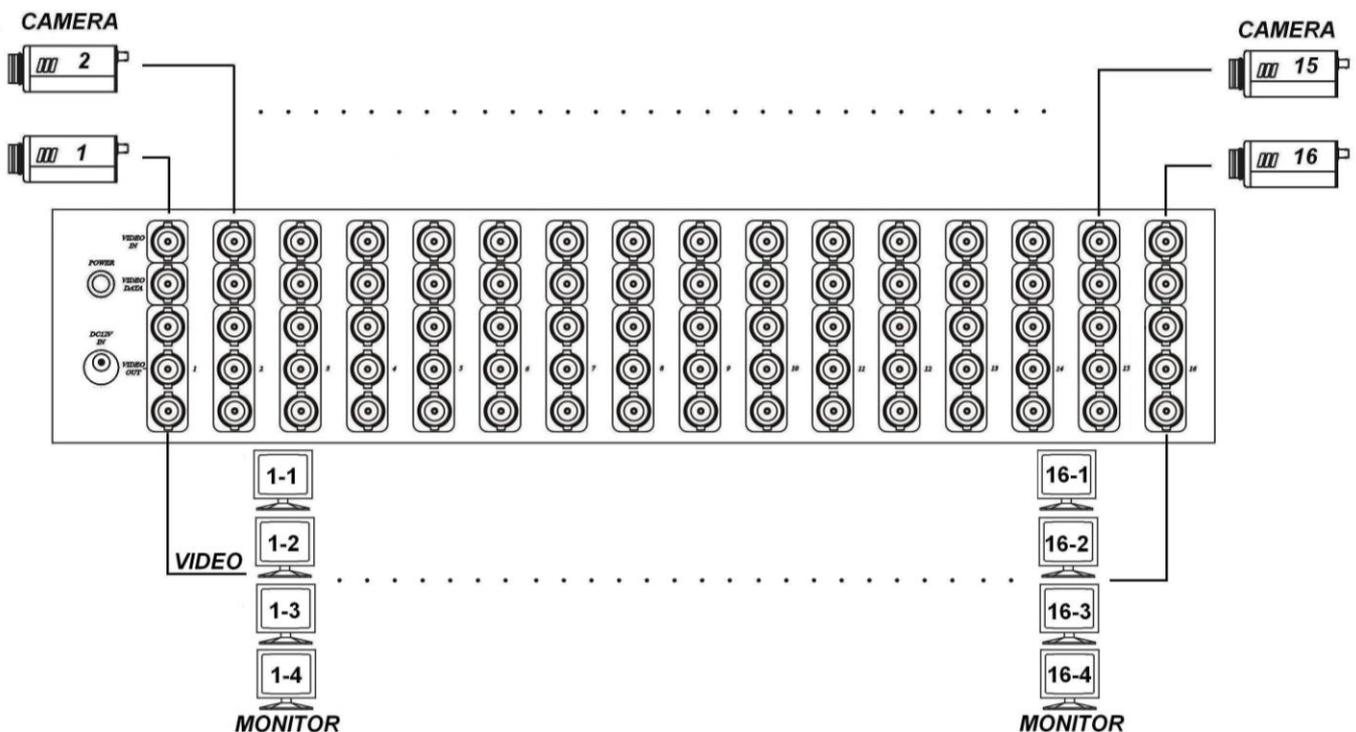


## Slide switch at VIDEO+DATA:

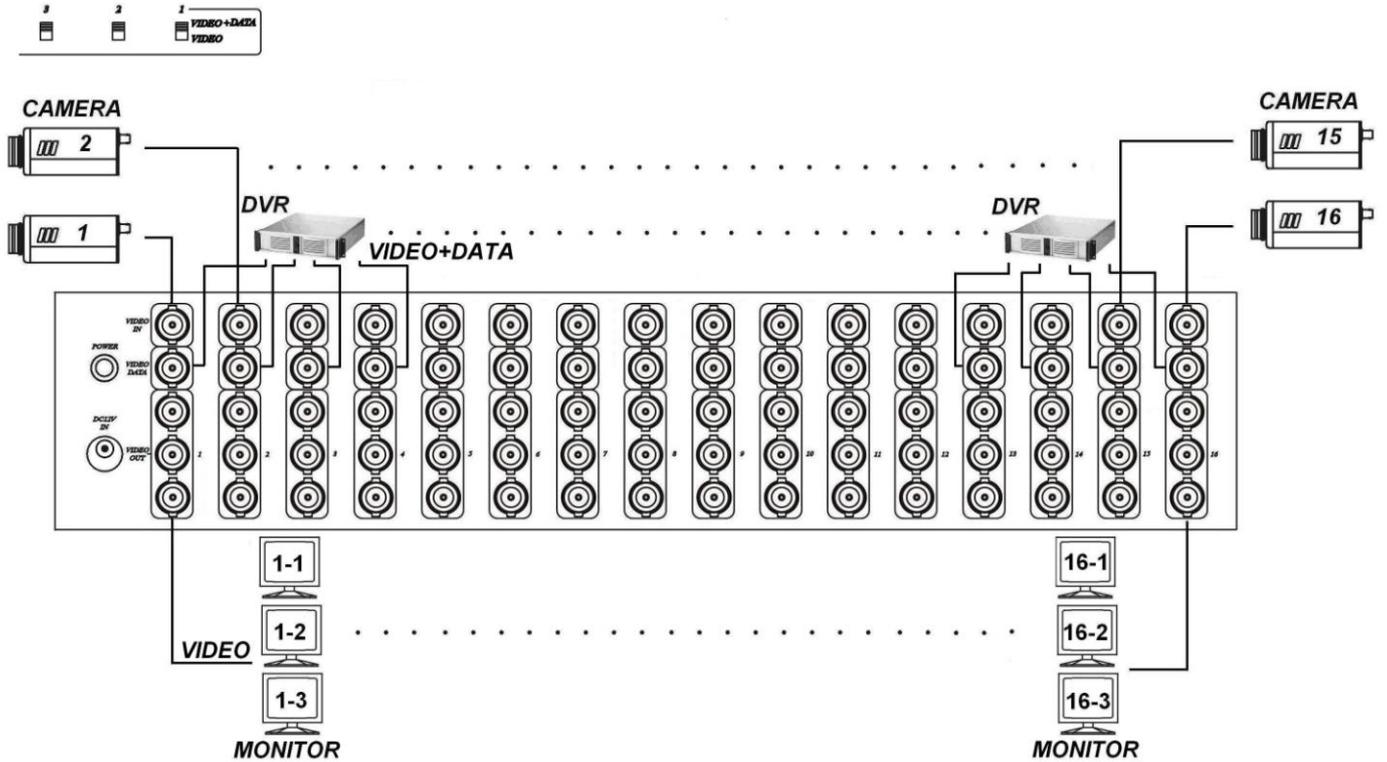

## Dip Switch Mode Function :

- VIDEO Output 1 support video only.
- VIDEO + DATA Output 1 support HD camera video with data control signal

## Panel View:

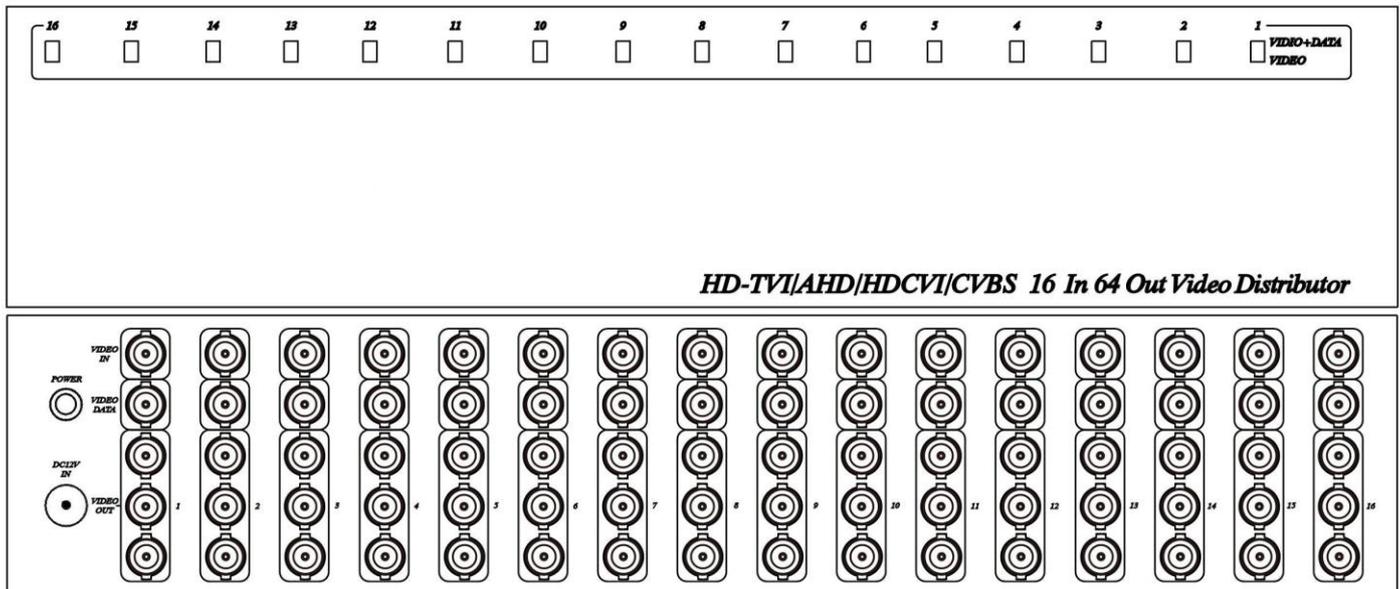

## Cable & Transmission Distance :

Link cable recommend use high quality 75ohm coaxial RG59/RG6U cable. The transmission distance will be affected by different quality of Camera, DVR and BNC connector, cable, installation...etc.

## LED Indication:

Orange Power ON/OFF

## Caution :

1. Output 1 under Video+Data mode, the output must connect with HD-DVR. Not allow to connect with CVBS Camera/DVR.

## Specifications:

ITEM NO.	CD1664HD
Video Input Channel	BNC x 16, 75Ω, 1Vpp
Video Output Channel	BNC x 64 75Ω, 1Vpp
Video Bandwidth	100MHz 0.1dB Gain Flatness
Power Supply	DC12V 1.2Amp
Power Consumption	960mA (Typ), 1150mA (Max)
Temperature	Operation: 0 to 55°C, Storage: -20 to 85°C, Humidity: up to 95%
Dimensions mm	483 x 91.5 x 88.4
Weight g	2700

RoHS   

Rev. A