


### 4MP 33X Starlight PTZ Network Camera

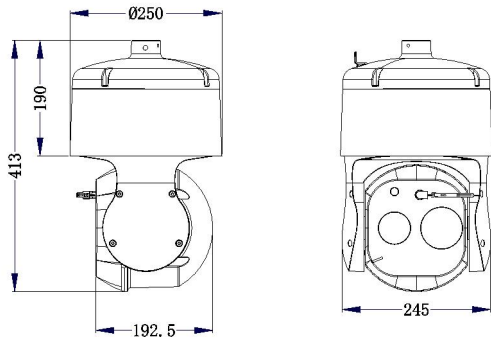

- 1/1.8" Progressive Scan 4MP CMOS
- 5.5~180mm, 33X Optical Zoom, 16X Digital Zoom
- Starlight Technology
- Auto-Induction Wiper
- Drive & Close-Loop Control System
- Positioning Accuracy: 0.05°
- Smart AI: Optional
- Laser Distance up to 800M

<b>Model No.</b>	<b>CB-33X-LS8041</b>
<b>Camera</b>	
Digital Video Processor	1/1.8" 4MP CMOS Sensor
RAM & ROM	1GB RAM / 8GB ROM
Frame Rate	2560*1440
Minimum Illumination	Color: 0.0005Lux@F1.5(AGC ON), B/W: 0.0001 Lux@F1.5(AGC ON)
Shutter Speed	Auto / 1/25s-1~100'000s
Slow Shutter	Support
Aperture	DC drive
Day & Night Switch	Auto, Dual IR-Cut Filter (Day / Night / Auto / Schedule)
IR Illuminator / Wavelength	Up to 800M / 850nm
<b>LENS</b>	
Lens Type	5.5~180mm Motorized 33X Optical Zoom Lens

Optical Zoom	33X				
Digital Zoom	16X				
Focus Control	Auto / Semi-Auto / Manual				
Iris Control	Auto Iris				
Aperture Value	Max. F1.5~F4.0				
<b>F.O.V.</b>					
Field of View (H)	58.9°~2.4° (Wide~Tele)				
Field of View (V)	33.6°~1.4° (Wide~Tele)				
Field of View (D)	67.2°~2.8° (Wide~Tele)				
Minimum Working Distance	100mm~1500mm				
Zoom Speed	Approximately 3.5s				
<b>DORI</b>					
DORI	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	5.5mm	43	43	21	17
	180mm	1200	1200	700	560
<b>Compression Standard</b>					
Video Compression	H.265 Main Profile / H.264 High Profile / H.264 Main Profile / H.264 Baseline Profile / MJPEG				
Video Bit Rate	32Kbps~16Mbps				
Audio Compression	G.711a / G.711u / G.722.1 / G.726 / MP2L2 / AAC / PCM				
Audio Bit Rate	64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-192Kbps(MP2L2) / 16-64Kbps(AAC)				
<b>Image</b>					
Max. Resolution	2560*1440@25/30fps				
Main Stream	50/60Hz: 25/30fps(2560*1440/1920*1080/1280*960/1280*720)				
Sub Stream	50/60Hz: 25/30fps(704*576/640*480/352*288)				
Third Stream	50/60Hz: 25/30fps(704*576)				
Image Setting	Saturation, Brightness, Contrast, Sharpness adjustable by Client Soft. Or Browse				
Exposure Mode	Auto Exposure / Aperture Priority / Shutter Priority / Manual Exposure				
Focus Mode	Auto Focus / One Step / Manual Focus / Semi-Auto Focus				
Area Exposure / Focus	Support				
Gain Control	Auto / Manual				
BLC / White Balance	BLC: On/Off, White Balance: (Auto / Manual / Lock)				
Defog	Support				
Day/Night Switch	Auto, Manual, Timing, Alarm Trigger				
Flip	Normal / Flip Vertical / Flip Horizontal / 180° / 90°Clockwise / 90°Anti-clockwise				
HLC	Support				
Image Stabilization (EIS)	Support				
DNR	3D DNR				
WDR	≥ 140dB				
S/N Ratio	≥ 60dB				
Picture Overlay Switch	Support BMP 24-bit image overlay, customizable area				
Region of Interest	Support 3 streams and 4 fixed areas				
Privacy Mask	On/Off, (8 Areas, Rectangle)				

Network	
Protocols	IPv4/IPv6, HTTP, HTTPS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP/IP, UDP, DHCP, PPPoE,
API	Onvif (Profile S, Profile G), PSIA, CGI
Baud Rate	1200 / 2400 / 4800 / 9600bps (Default:115200bps)
Streaming Method	Unicast / Multicast
Simultaneous	Live View Up to 20 Channels
User/Host	5 Users
Security	Password Protection, Complicated Password, HTTPS Encryption, IP Address Filter, Control Timeout Settings
Video Management Software	IE / Web / PC Client Software / App
WEB	IE10/11, Safari V12.1 above, Firefox V.52 above, Google Chrome V.57 above, Edge V.79 above
Mobile Client	iOS, Android
P2P	Support iOS / Android / PC
PTZ	
3D Intellectual	Support
Horizontal Rotation Range	0~360° endless
Horizontal Rotation Speed	Pan Speed: Configurable from 0.05° to 200°/s; Preset Speed: 200°/s
Tilt Rotation Range	-25~90°
Tilt Rotation Speed	Tilt Speed: Configurable from 0.05° to 120°/s; Preset Speed: 120°/s
Preset Points	255
Patrol Scan	6 Patrols, up to 18 Presets per patrol
Pattern	4 Patterns, with total recording time not less than 10mins
A-B Scan	User Programmable
A-B Scan Speed	8 Levels Setting Available (1-8)
3D Positioning	Support
PWR On Action	Memory / Pattern 1 / Tour 1 / 360° Scan / A-B Scan / Preset 1-18 / None
Park Time	5~720s available
Dwell Preset	10~120s available
Power-Off Memory	Support
Anti-Flash	50Hz / 60Hz
Wiper	Automatic Induction Wiper (Auto / Manual)
Infrared	
Laser Distance	Up to 800M
Laser Intensity	Automatically adjusted, depending on the zoom ratio
Interface	
Ethernet Interface	RJ45*1, 10M/100M self-adaptive
Storage	Support 256G Micro SD / SDHC / SDXC offline local storage, NAS (NFS, SMB / CIFS support)
Alarm	1CH Input, 1CH Output
Audio	1CH Input, 1CH Output
Alarm	
Snapshot	Remote Timing Snapshot, Mobile View Images Snapshot
Motion Detection	Intelligent Multiple Detection Zones (Max. 4 Zones)

Alarm Linkage	E-mail Alert and Upload Snapshot to FTP, Relay Out, Mobile Phone App
<b>Event</b>	
Basic Event	Motion Detection, Alarm Input and Output
Smart Event	Area Intrusion Detection, Audio Detection, Line Crossing Detection, Region Entrance/Exiting Detection, Wandering Detection, Quick Motion Detection, Parking Detection, Personnel Gathering Detection, Scene Change Detection
AI Function (Optional)	Support vehicle, non-motor vehicle, human body detection
Smart Tracking	Auto Tracking
Alarm Linkage	Upload to FTP, E-mail, Trigger Alarm Output, Trigger Recording
<b>General Parameter</b>	
Operating Temp.	Indoor: 0~40°, Outdoor: -40°~+65°
Humidity	≤ 95% Non Condensing
Power	AC 24V
Power Consumption	≤ 48W
Dimension	250(W)*413(H)mm
Weight	7.8KG
Protection Level	IP66, TVS 4000V Lightning Protection, Surge Protection
Mounting Bracket	Wall Mount Bracket or Ceiling Mount Bracket
<b>Approvals</b>	
Certification	CE / FCC / RoHS
ISO	ISO9001