


### 20X 3MP+3MP Dual Lens AI PTZ WiFi Camera

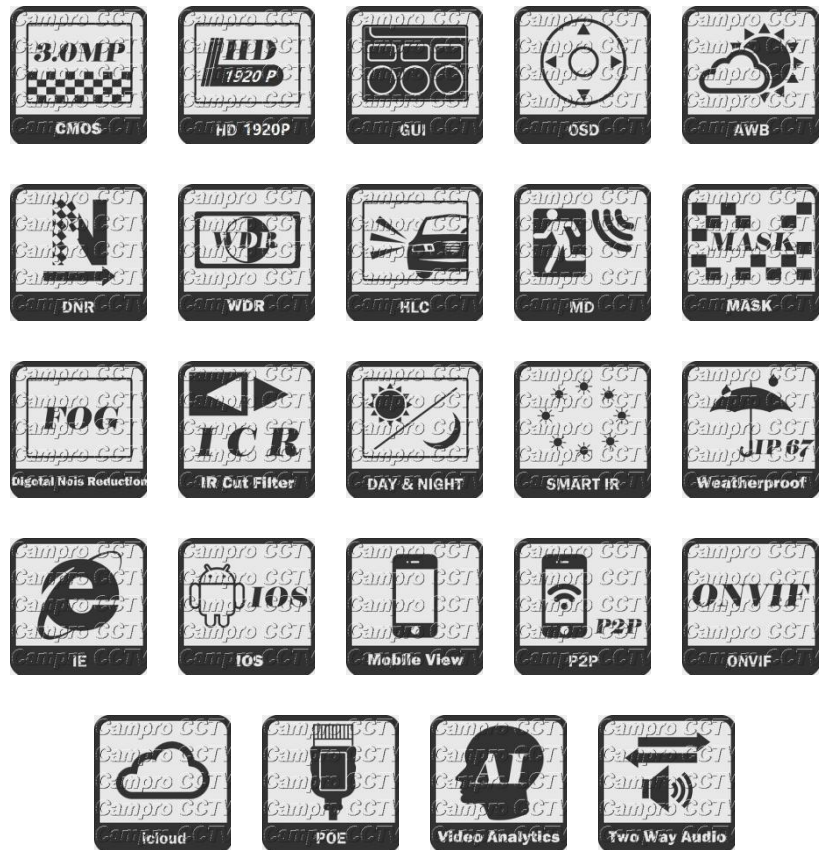

- Support Voice Broadcast, Humannoid Detection
- Support IR & Warm Light illumination to deal with different scenes and achieve full-color illumination
- Support 6KV Lightning Surge Protection
- Support IP66 Wterproof Function, Applicable to a wide range of scenarios
- Support both RJ45 Network Port and WiFi connection
- Support Max. 512GB TF Card
- Support Two-Way Voice Call
- Support Mobile Phone Monitoring (iOS, Android), Pushing Alarm to Mobile Phone
- PTZ CH linked to fixed camera's Smart Intrusion Prevention to track the objects triggering the rule

<b>Model No.</b>	<b>CB-26X-1233AI</b>	
<b>Camera</b>		
Digital Video Processor	1/2.8" 3MP CMOS Sensor	1/2.8" 3MP CMOS Sensor
Minimum Illumination	Color: 0.001Lux@F1.2(AGC ON), B/W: 0 Lux@IR ON	
Day & Night	Auto, Dual IR-Cut Filter	
Electronic Shutter	Auto / 1/5s-1~20'000s adjustable	
Wide Dynamic Range	True WDR ≥ 120dB	
S/N Ratio	≥60dB	
<b>Lens</b>		
Lens type	4.0mm	5~130mm Motorized 26X Optical Zoom Lens
Optical Zoom	N/A	26X

Iris	F1.0	Auto; F1.5(W)~F3.8(T)			
Field of View (H)	94.9	56.9° ~ 2.9° (Wide~Tele)			
Field of View (V)	51.5	32.2° ~ 1.6° (Wide~Tele)			
Field of View (D)	116.7	68.4° ~ 3.4° (Wide~Tele)			
<b>DORI</b>					
DORI	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	4mm (Panorama)	62.1	24.8	12.4	6.2
	5mm	123.8	49.5	24.8	12.4
	130mm	2478	992	496	248
<b>Illuminator</b>					
IR Range	Blue & Red Dual Light IR Led*6 up to 20M		Array IR Led*6 up to 120M		
Warm Light Range	Warm Light*6 up to 20M		Warm Light*4 up to 60M		
Wavelength	850nm (IR)		850nm (IR)		
Light On/Off Control	Auto/Manual		Auto/Manual		
<b>Video</b>					
Max Resolution	2304*1296@25/30fps				
Main Stream	25/30fps: 2304*1296, 1920*1080, 960P: 1280*960, 720P: 1280*720				
Sub Stream	Sub Stream@25/30fps: 800*448, 704*576, 640*360, 352*288				
Video Compression	Main stream: H.265+/H.265/H.264+/H.264 Sub-stream: H.265+/H.265/H.264+/H.264/MJPEG				
Video Bit Rate	128Kbps~12Mbps				
Audio Compression	G.711A				
Audio Bite Rate	Minimum 8 Kbps or Higher				
<b>Image</b>					
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2				
Digital Noise Reduction	2D/3D DNR				
Smart IR	Support				
HLC	Support				
BLC	Support				
Defog	Digital defog				
<b>Events</b>					
Basic Detection	Motion Detection, Audio Detection, Tampering Alarm				
Auto Tracking	N/A		Support		
General Function	Watermark, IP Address Filtering, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication				
<b>Audio</b>					
Audio Compression	G.711A				
Audio Bit Rate	64 Kbps				
Two-Way Audio	Support				
Audio and Video Sync.	Support				
Sampling Rate	8 kHz				
<b>Storage</b>					

Edge Storage	Micro SD, up to 512 GB	
Network Storage	ANR	
<b>Network</b>		
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP, SSL/TLS	
Compatible Integration	ONVIF, API, SDK	
User/Host	Up to 32 users. 3 user levels: administrator, operator and common user	
Security	Password protection, strong password, HTTPS encryption, Export operation logs, basic and digest authentication for RTSP, digest authentication for HTTP, TLS 1.2, WSSE and digest authentication for ONVIF	
Client Soft / App	Support	
Web Browser	Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above	
<b>Pan / Tilt</b>		
Protocols	N/A	360°
API	N/A	0.1°/s ~ 80°/s
Baud Rate	N/A	Preset speed: 80°/s
Simultaneous	18° ± 5°	- 15° ~ 90°
User/Host	N/A	0.1°/s ~ 80°/s
Security	N/A	Preset speed: 80°/s
Video Management Software	IE / Web / PC Client Software / App	
Mobile App / P2P	iOS, Android , PC	
Web Browser	Plug-in required live view: IE 10+, Plug-in free live view: Chrome 57.0+, Firefox 52.0+, Local service: Chrome 57.0+, Firefox 52.0+	
Streaming Method	Unicast / Multicast	
<b>Interface</b>		
Audio I/O	1CH Input, 1CH Output	
Alarm I/O	N/A	
Serial Port	1*RS485	
Built-in Mic	Support	
Built-in Speaker	Support	
Wi-Fi	2.4G	
Network	1*RJ45 10M/100M Base-TX Ethernet	
Video Output	N/A	
<b>Alarm</b>		
Snapshot	Remote Timing Snapshot, Mobile View Images Snapshot	
Motion Detection	Intelligent Multiple Detection Zones (Max. 4 Zones)	
Humanoid Detection	Humanoid Detection Record, Snapshot, Alarm Output, Tracking	
Alarm Linkage	E-mail Alert and Upload Snapshot to FTP, Relay Out, Mobile Phone App	
<b>Intelligent Analysis</b>		
Basic Event	Motion Detection, Alarm Input and Output	
Smart AI Function	Humanoid Detection, Perimeter Intrusion Detection, Cross Line Detection	

Smart Tracking	Auto Tracking
Alarm Linkage	Upload to FTP, E-mail, Trigger Alarm Output, Trigger Recording
<b>General Parameter</b>	
Operating Temp.	Indoor: 0~40°, Outdoor: -40°~+65°
Humidity	≤95% Non Condensing
Power	DC12V ≤ 2A
Power Consumption	≤ 12W
Dimension	171(W)*254(H)mm 160(W)*160(D)*300(H)mm
Weight	0.9KG (N.W), 1.1KG (G.W)
Related Validation	IP66
Surge protection	6KV
Reset button	Support
<b>Approvals</b>	
Certification	CE / FCC / RoHS
ISO	ISO9001